




# INSTALLATION INSTRUCTIONS

Accessory <b>CENTERSTAND P/N 08M50-MGE-101</b>	Application <b>VFR1200F VFR1200FD</b>	Publications No. <b>MII 13068-13260</b>
		Issue Date <b>Revised April 2010</b>

**Honda Dealer: Please give a copy of these instructions to your customer.**

## PARTS LIST

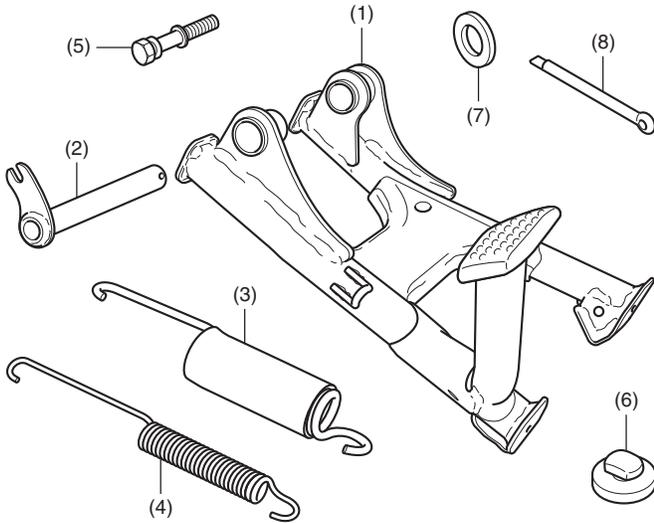

No.	Description	Qty
(1)	Centerstand	1
(2)	Shaft	1
(3)	Spring (with rubber)	1
(4)	Spring (narrow)	1
(5)	Spring hook	1
(6)	Rubber	1
(7)	Washer	2
(8)	Split pin	1

## TOOLS AND SUPPLIES REQUIRED

- Socket (14 mm)
- Ratchet
- Spring tool
- Long nose pliers
- Grease
- Dishwashing liquid solution  
(Solution: Water/Dishwashing liquid 100:1)
- Shop towel
- Torque wrench

## TORQUE CHART

Tighten all screws, bolts, and nuts to their specified torque values. Refer to the Service Manual for the torque values of the removed parts.

Item	N-m	kgf-m	lbf-ft
Spring hook	21.5	2.2	16

## USE AND CARE INFORMATION

- Before riding your motorcycle, check that the sidestand and the centerstand are fully retracted.
- Always set the parking brake when parking the VFR1200FD (DCT model) on the centerstand.
- Always choose flat, firm ground when setting the centerstand.
- Check the accessory mounts frequently and retighten if necessary.

## INSTALLATION


### CAUTION:

- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.



### NOTE:

- Be extremely careful when installing the springs as the combined tension of the springs is very strong.
- Keep the motorcycle on its sidestand when installing the centerstand.
- The spring installation should be performed by two people. While one person holds the motorcycle, another person installs the spring.


1. Apply dishwashing liquid solution to the rubber in the area shown.

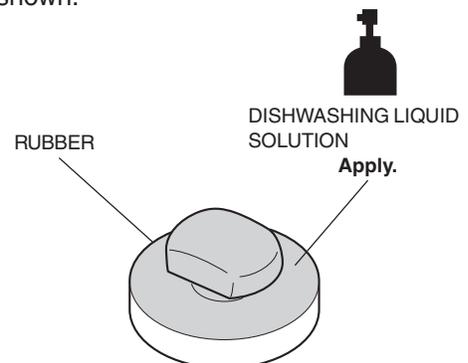


2. Install the rubber in the position shown.

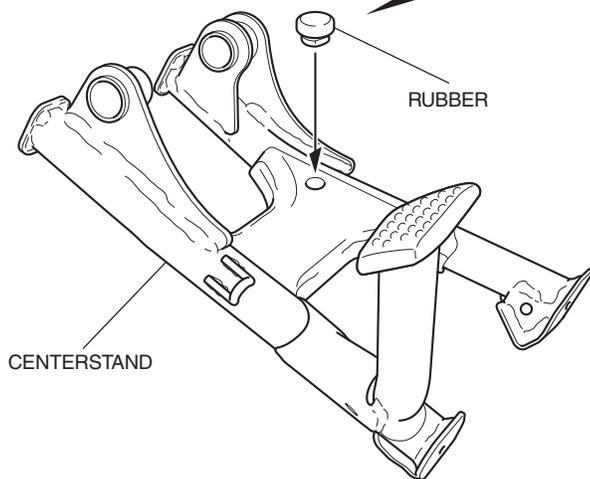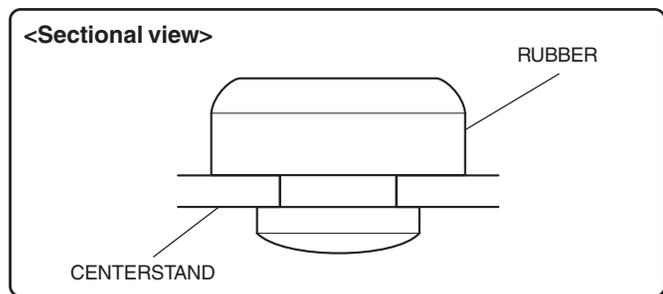


3. Apply grease to the position shown.

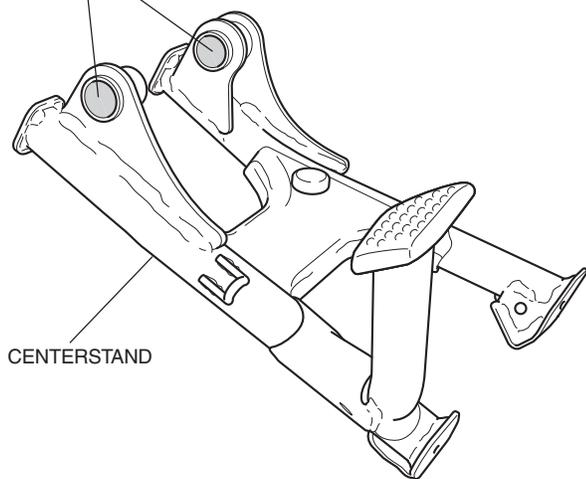


4. Install the centerstand as shown.

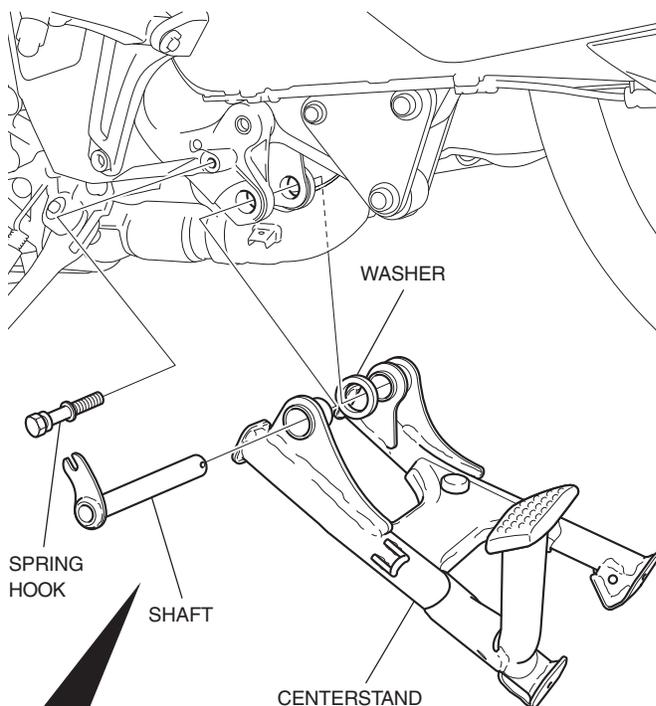



Insert the shaft halfway and tighten the spring hook at the position shown.

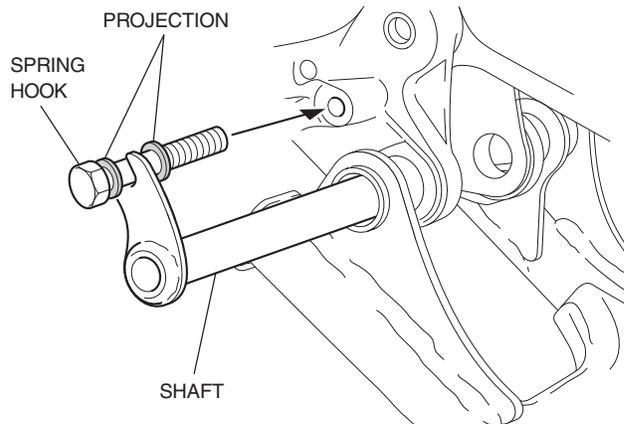

5. Slide the narrow spring into the large spring (with rubber).

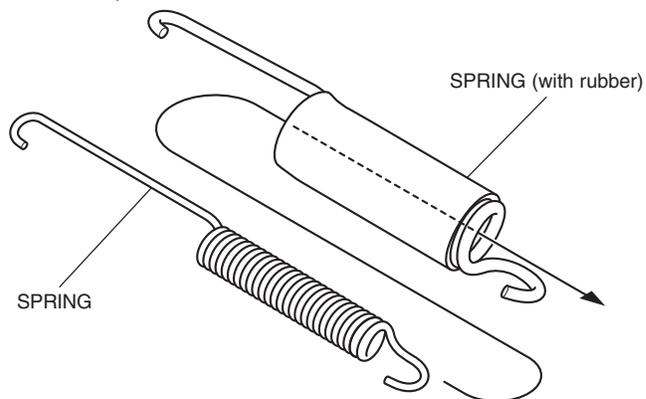

6. Install the spring assembly as shown.
- **First install the spring assembly to the spring hook, then to the centerstand.**
  - **The spring installation should be performed by two people. While one person holds the motorcycle, another person installs the spring.**

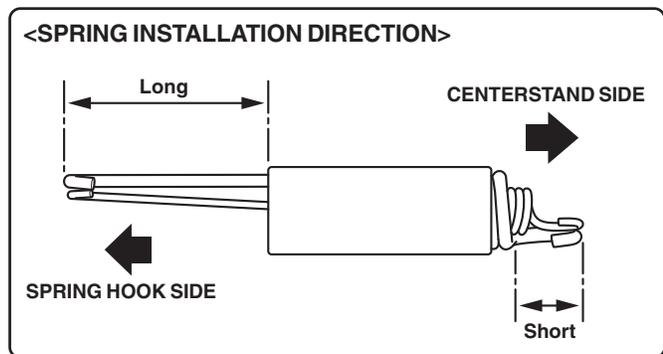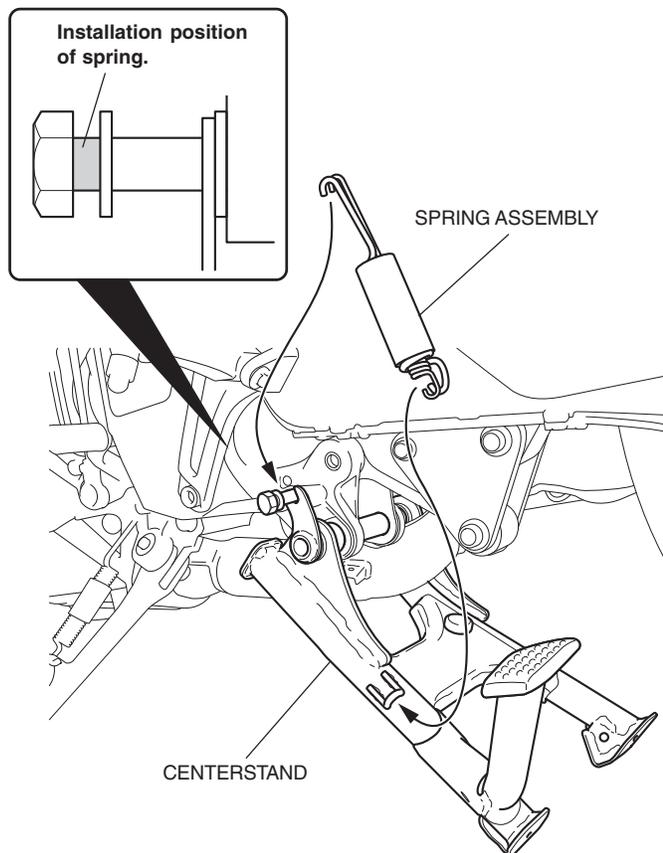

7. Install the washer and split pin as shown.

<Right side>

