


## PARTS LIST

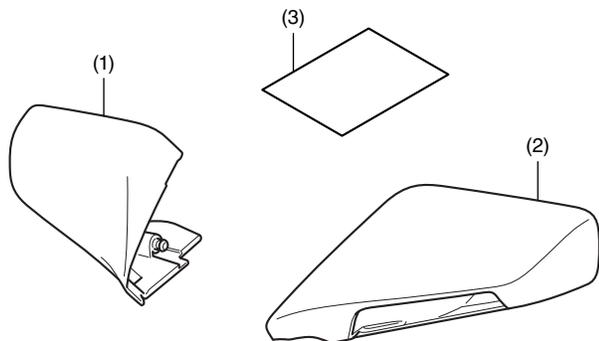

No.	Description	Qty
(1)	Right mirror cover	1
(2)	Left mirror cover	1
(3)	Installation Instruction URL	1

## TORQUE CHART

Refer to the Service Manual for the torque values of the removed parts.


## INSTALLATION

### NOTE:


- Disconnect the negative (-) battery cable before installing this accessory.
- The memory of the clock will be erased when you disconnect the battery. Reset the clock after reconnecting the battery.

1. Remove the indicated clips.

<Left side>

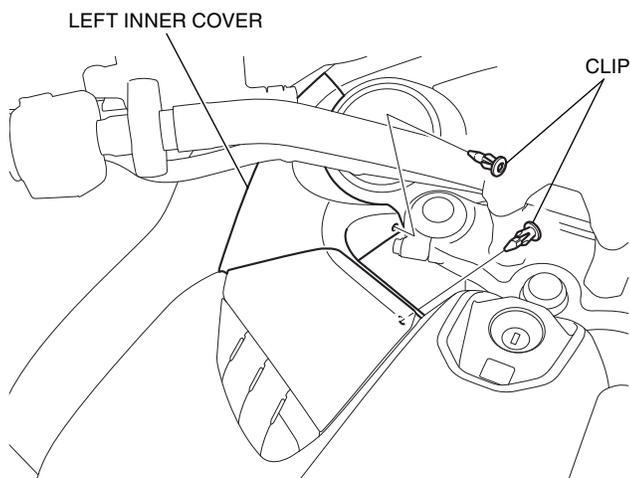


2. Remove the left inner cover, and then disconnect the negative (-) battery cable.


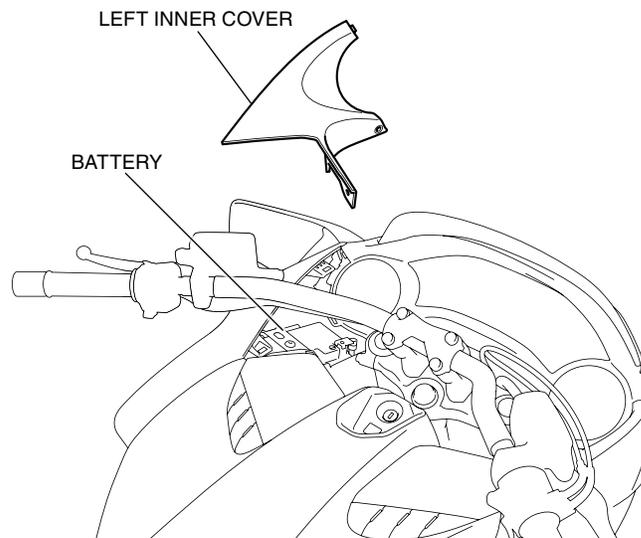


3. Remove the left mirror cover as shown.


<Left side>

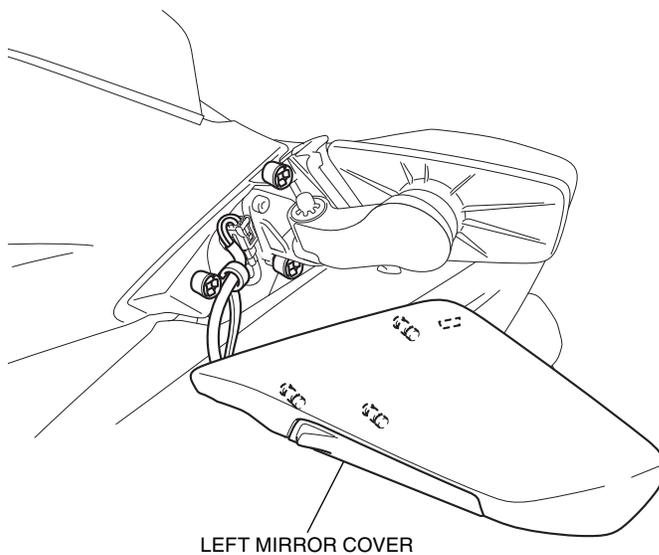

4. Remove the left turn signal light harness as shown.

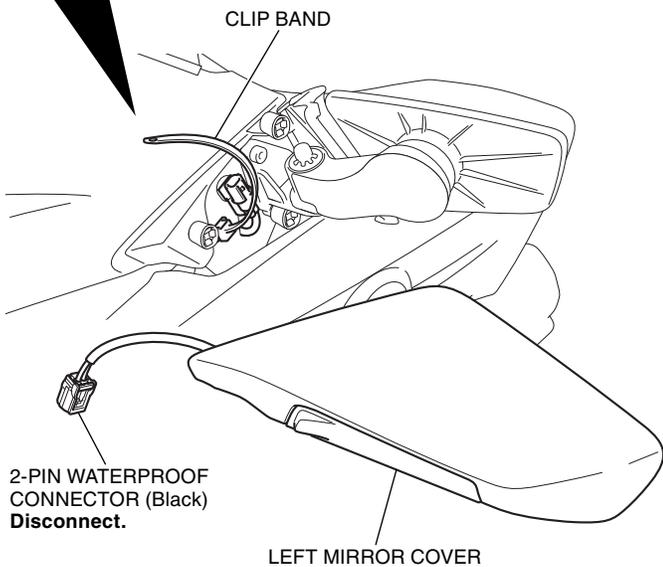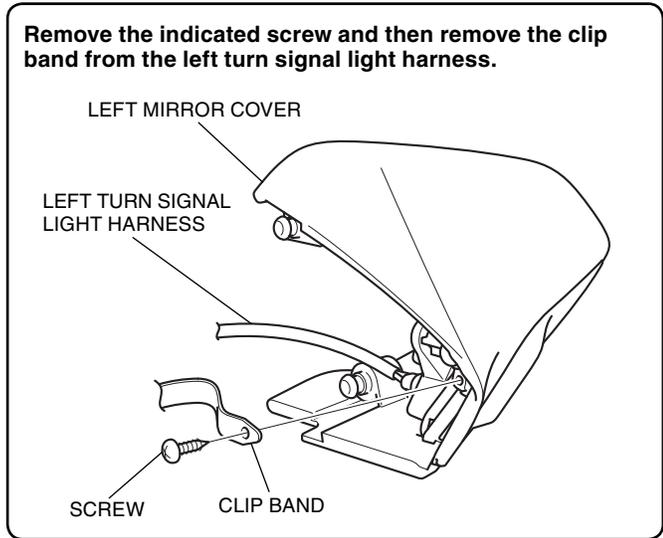

5. Remove the left turn signal light from the left mirror cover.

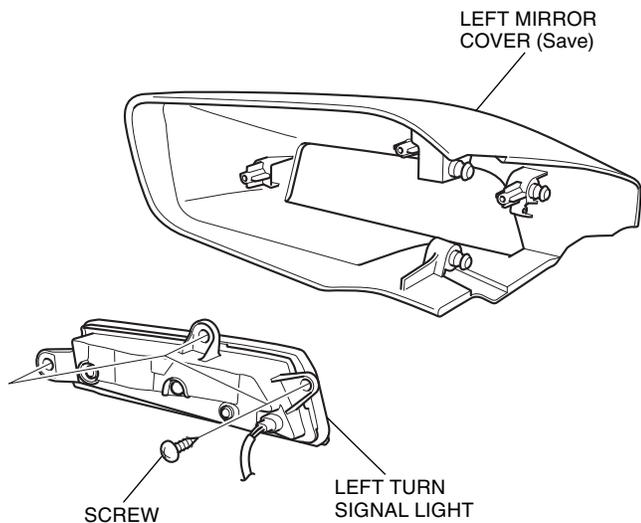

6. Install the left turn signal light into the accessory left mirror cover in reverse order of the removal.
7. Install the accessory left mirror cover in the reverse order of removal.
8. Repeat Steps 3 through 7 on the right side.
9. Install the removed parts in the reverse order of removal.
10. Check the function of each turn signal light.